

www.h2oneutralizer.com

Model 3M
3100 Series

Chlorinate/ DeChlorinate

H₂O Neutralizer's
Patented
Venturi
Design
Operates on
Nothing
But the
Flow of Water
Through the
Device



3M-3150
Total
Solution
Package
Shown
Here

Five
Package
Combinations
to Choose
From

U.S. Patent # 6,264,846

with
H₂O Neutralizer[®]
Simply **2** the Best Chlorinator/DeChlorinator on the Market Today

Rated for Flow Range
of 10 to 1300+gpm

H₂O Neutralizer's patented Lateral Bypass Venturi design provides superior performance, achieving full vacuum at flows as low as 10 GPM with consistent solution feed of 1 gallon per minute through its entire rated range of flow.

from



Measurement Technologies



Truly the Most Effective Chlorinator/Dechlorinator Available Anywhere.

With its patented venturi design and orifice ring inserts H₂O Neutralizer delivers a range of performance no other device on the market today can match.


Able to draw one gallon per minute of chemical at flow rates as low as 10 GPM, the model 3M can handle flow rates over thirteen hundred gallons per minute with consistent chemical injection performance throughout the entire range of flow rates.

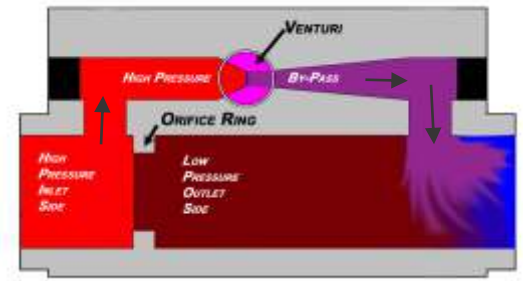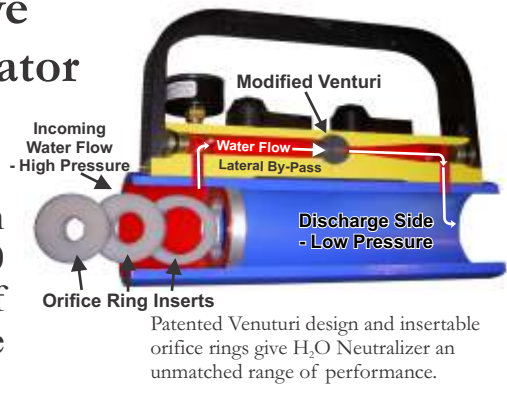

It's patented lateral-by-pass venturi permits the H₂O Neutralizer to operate with no power...



just the flow of water creates the vacuum needed...

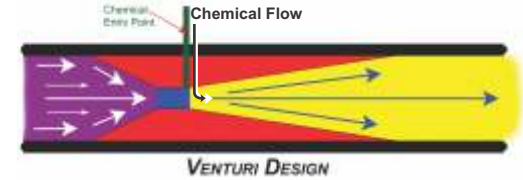

to draw in chemical at 1 GPM at flow rates through the device ranging from 10 GPM to over 1300 GPM.

Performance Range
GPM Flow Range

Device	Flow Range (GPM)	Chemical Draw Rate (GPM)
3M H ₂ O Neutralizer (3M-3100)	10 - 1300	0.1 - 1.0
3M H ₂ O Neutralizer (3M-3105)	10 - 1300	0.1 - 1.0
3M H ₂ O Neutralizer (3M-3150)	10 - 1300	0.1 - 1.0
3M H ₂ O Neutralizer (3M-3155)	10 - 1300	0.1 - 1.0
3M H ₂ O Neutralizer (3M-3165)	10 - 1300	0.1 - 1.0

NOTE: All of the above devices are designed to connect to 2" FNPT Female threaded connection. The 3M H₂O Neutralizer® is the only device that can be further down to connect to 1" service line.
 Legend:
 - Operating range of device with full suction
 - Suction range within this operating range
 - Suction range where only part of the water flow comes in contact with the liquid. Non-suction with the other portion of water which can take place outside of the equipment.

No other device on the market can match H₂O Neutralizer's range of performance.



3M-3100

Available in a variety of packages, there is sure to be combination to meet your project requirements.

Give us a call, or visit us on-line, today to learn more about how H₂O Neutralizer can deliver better performance in your chlorination and dechlorination projects.

3M H₂O Neutralizer Packages



Chlorination Kit



Diffuser Kit

	3M-3100	3M-3105	3M-3150	3M-3155	3M-3165
3M H₂O Neutralizer includes: 3M H ₂ O Neutralizer Device & Storage Case, Orifice Ring Insert set (1.5", 1.0", 0.75"), 3" Type "D" Cam Lock Adaptor (2½" FNST x 3"), - 5' - ¾" Tubing (2), - 16oz. No-Chlor™ Calcium thiosulfate	✓	✓	✓	✓	✓
Chlorination Kit Includes: 3" Type "D" Cam Lock x 2" FNPT Adaptor with Test Port		✓		✓	✓
Diffuser Kit includes: 3" x 20' Nitrile Rubber Discharge hose, 3" Full Flow Diffuser, - 3" Dust Cap			✓	✓	✓
EZ Mount Kit includes: 3" x 10" Nitrile Rubber Hose, EZ Mount Arm System					✓

H₂O Neutralizer®

Simply the Best Chlorinator/DeChlorinator on the Market Today



from **Measurement Technologies**

www.h2oneutralizer.com

PO Box 2195, Redmond, WA 98073

Toll Free 877-889-8482