

www.h2oneutralizer.com

Model 3M
3200 Series

Chlorinate/ DeChlorinate

H₂O Neutralizer's
Patented
Venturi
Design
Operates on
Nothing
But the
Flow of Water
Through the
Device

Five
Package
Combinations
to Choose
From



3M-3250
Total
Solution
Package
Shown
Here

U.S. Patent # 6,264,846

with
H₂O Neutralizer[®]
Simply **2** the Best Chlorinator/DeChlorinator on the Market Today

Rated for Flow Range
of 10 to 1300+gpm

H₂O Neutralizer's patented Lateral Bypass Venturi design provides superior performance, achieving full vacuum at flows as low as 10 GPM with consistent solution feed of 1 gallon per minute through its entire rated range of flow.

from


Measurement Technologies




Truly the Most Effective Chlorinator/Dechlorinator Available Anywhere.

With its patented venturi design and orifice ring inserts H₂O Neutralizer delivers a range of performance no other device on the market today can match.

Able to draw one gallon per minute of chemical at flow rates as low as 10 GPM, the model 3M can handle flow rates over thirteen hundred gallons per minute with consistent chemical injection performance throughout the entire range of flow rates.

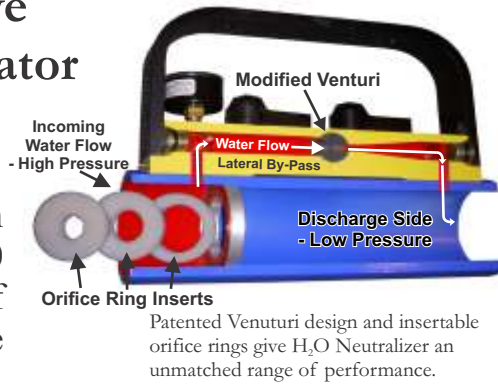


Patented Venturi design and insertable orifice rings give H₂O Neutralizer an unmatched range of performance.

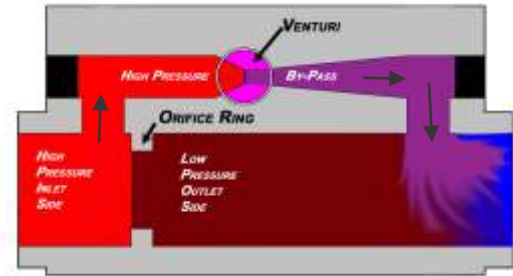

It's patented lateral-by-pass venturi permits the H₂O Neutralizer to operate with no power...



just the flow of water creates the vacuum needed...

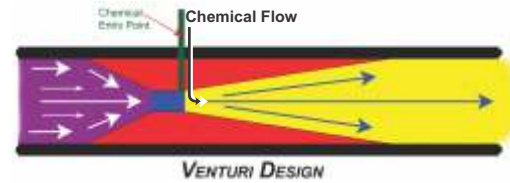

to draw in chemical at 1 GPM at flow rates through the device ranging from 10 GPM to over 1300 GPM.



3M-3200

Available in a variety of packages, there is sure to be combination to meet your project requirements.

Give us a call, or visit us on-line, today to learn more about how H₂O Neutralizer can deliver better performance in your chlorination and dechlorination projects.



NOTE: All of the above devices are designed to connect to 2" FNPT Flat Hydrant threaded connections. The 3M H₂O Neutralizer® is the only device that can be further down to connect to 1" service lines.
 - Lateral Feed Applications: Operating range of device with full suction; Maximum suction within this operating range.
 - Lateral Feed Applications: Maximum suction when water source is located with the device; flow rates with the other portion of water which can take place outside of the equipment.

No other device on the market can match H₂O Neutralizer's range of performance.



Chlorination Kit



Diffuser Kit

3M H₂O Neutralizer Packages

| | 3M-3200 | 3M-3205 | 3M-3250 | 3M-3255 | 3M-3265 |
|---|---------|---------|---------|---------|---------|
| 3M H₂O Neutralizer includes: 3M H ₂ O Neutralizer Device & Storage Case, Orifice Ring Insert set (1.5", 1.0", 0.75"), 3" Type "D" Cam Lock Adaptor (2½" FNPT x 3"), - 5' - ¾" Tubing (2), - 16oz. No-Chlor™ Calcium thiosulfate | ✓ | ✓ | ✓ | ✓ | ✓ |
| Chlorination Kit Includes: 3" Type "D" Cam Lock x 2" FNPT Adaptor with Test Port' | | ✓ | | ✓ | ✓ |
| Diffuser Kit includes: 3" x 20' Nitrile Rubber Discharge hose, 3" Full Flow Diffuser, - 3" Dust Cap | | | ✓ | ✓ | ✓ |
| EZ Mount Kit includes: 3" x 10" Nitrile Rubber Hose, EZ Mount Arm System | | | | | ✓ |

H₂O Neutralizer®

Simply the Best Chlorinator/DeChlorinator on the Market Today

from

www.h2oneutralizer.com

Measurement Technologies

PO Box 2195, Redmond, WA 98073

Toll Free 877-889-8482

