

Chlorinate/ DeChlorinate

H₂O Neutralizer's
Patented
Venturi
Design
Operates on
Nothing
But the
Flow of Water
Through the
Device

Five
Package
Combinations
to Choose
From



3M-3250
Total
Solution
Package
Shown
Here

U.S Patent # 6,264,846

with
H₂O Neutralizer®
Simply **2** the Best Chlorinator/DeChlorinator on the Market Today

Rated for Flow Range
of 10 to 1300+gpm

H₂O Neutralizer's patented Lateral Bypass Venturi design provides superior performance, achieving full vacuum at flows as low as 10 GPM with consistent solution feed of 1 gallon per minute through its entire rated range of flow.

from



Measurement Technologies



Truly the Most Effective Chlorinator/Dechlorinator Available Anywhere.

With its patented venturi design and orifice ring inserts H₂O Neutralizer delivers a range of performance no other device on the market today can match.


Able to draw one gallon per minute of chemical at flow rates as low as 10 GPM, the model 3M can handle flow rates over thirteen hundred gallons per minute with consistent chemical injection performance throughout the entire range of flow rates.

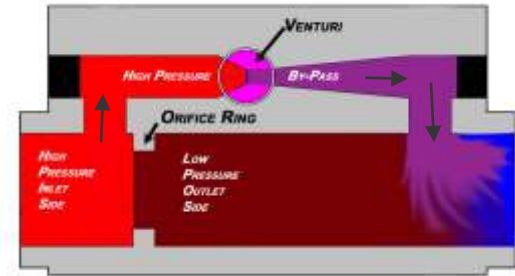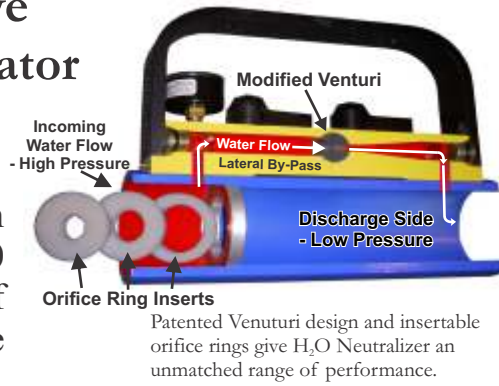

Its patented lateral-by-pass venturi permits the H₂O Neutralizer to operate with no power...



just the flow of water creates the vacuum needed...

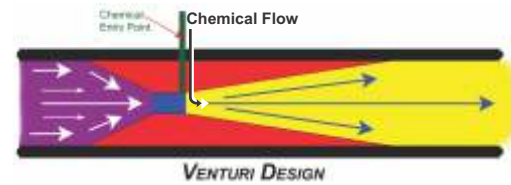

to draw in chemical at 1 GPM at flow rates through the device ranging from 10 GPM to over 1300 GPM.

Performance Range
GPM Flow Range

Device	10	20	30	40	50	60	70	80	90	100	120	150	200	300	400	500	600	700	800	900	1000	1200	1500	1800	2000	
3M H ₂ O Neutralizer (3M-3200)	✓																									
3M H ₂ O Neutralizer (3M-3205)	✓																									
3M H ₂ O Neutralizer (3M-3250)	✓																									
3M H ₂ O Neutralizer (3M-3255)	✓																									
3M H ₂ O Neutralizer (3M-3265)	✓																									

NOTE: All of the above devices are designed to connect to 2" FNPT Full Hydrant threaded connection. The 3M H₂O Neutralizer® is the only device that can be further down to connect to 1" service lines.

Legend: Full flow range (blue), Operating range of device with full service (red), Minimum service within full operating range (yellow), Limited flow range (purple).

Flow range shown where only part of the water flow comes in contact with the liquid. Flow rates with the other portion of water which can take place outside of the equipment.

No other device on the market can match H₂O Neutralizer's range of performance.



3M-3200

Available in a variety of packages, there is sure to be combination to meet your project requirements.

Give us a call, or visit us on-line, today to learn more about how H₂O Neutralizer can deliver better performance in your chlorination and dechlorination projects.

3M H₂O Neutralizer Packages

	3M-3200	3M-3205	3M-3250	3M-3255	3M-3265
3M H₂O Neutralizer includes: 3M H ₂ O Neutralizer Device & Storage Case, Orifice Ring Insert set (1.5", 1.0", 0.75"), Type "D" Cam Lock Adaptor (3" FNPT x 3"), - 5' - 3/8" Tubing (2), - 16oz. No-Chlor™ Calcium thiosulfate	✓	✓	✓	✓	✓
Chlorination Kit Includes: 3" Type 'D' Cam x 2" FNPT with Test Port		✓		✓	✓
Diffuser Kit includes: 3" x 20' Nitrile Rubber Discharge hose, 3" Full Flow Diffuser, - 3" Dust Cap			✓	✓	✓
EZ Mount Kit includes: 3" x 20" Nitrile Rubber Hose, EZ Mount Arm System					✓



Chlorination Kit



Diffuser Kit

H₂O Neutralizer®

Simply the Best Chlorinator/DeChlorinator on the Market Today

from

www.h2oneutralizer.com

Measurement Technologies

PO Box 2195, Redmond, WA 98073

Toll Free 877-889-8482

