

# Chlorinate/ DeChlorinate



U.S Patent  
# 6,264,846

Three  
Package  
Combinations  
to Choose  
From

5M-5250  
Total  
Solution  
Package  
Shown  
Here

Rated for  
Flow Range  
of  
10 to 4000+  
gpm

H<sub>2</sub>O Neutralizer's Patented Venturi Design  
Operates on Nothing But the  
Flow of Water Through the Device

with  
**H<sub>2</sub>O Neutralizer**<sup>®</sup>  
Simply **2** the Best Chlorinator/DeChlorinator on the Market Today

H<sub>2</sub>O Neutralizer's patented Lateral Bypass Venturi design provides superior performance, achieving full vacuum at flows as low as 10 GPM with consistent solution feed of 1 gallon per minute through its entire rated range of flow.

from


# Measurement Technologies




# Truly the Most Effective Chlorinator/Dechlorinator Available Anywhere.

With its patented venturi design and orifice ring inserts H<sub>2</sub>O Neutralizer delivers a range of performance no other device on the market today can match.

Able to draw one gallon per minute of chemical at flow rates as low as 10 GPM, the model 5M can handle flow rates over thirteen hundred gallons per minute with consistent chemical injection performance throughout the entire range of flow rates.

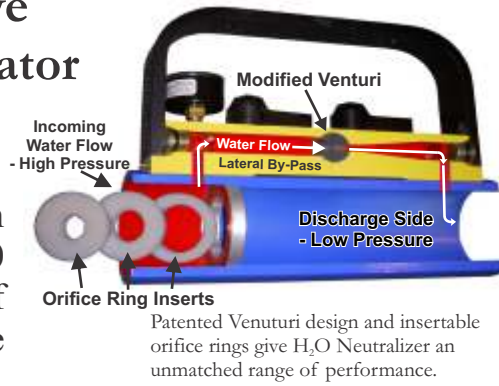


Patented Venuturi design and insertable orifice rings give H<sub>2</sub>O Neutralizer an unmatched range of performance.

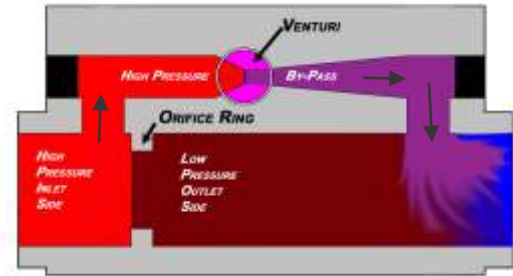

It's patented lateral-by-pass venturi permits the H<sub>2</sub>O Neutralizer to operate with no power...



just the flow of water creates the vacuum needed...

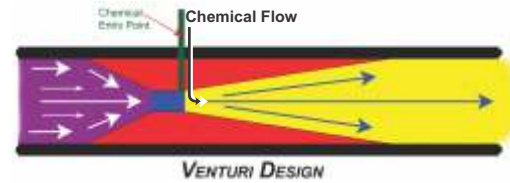

to draw in chemical at 1 GPM at flow rates through the device ranging from 10 GPM to over 4000 GPM.



5M-5200

Available in a variety of packages, there is sure to be combination to meet your project requirements.

Give us a call, or visit us on-line, today to learn more about how H<sub>2</sub>O Neutralizer can deliver better performance in your chlorination and dechlorination projects.



No other device on the market can match H<sub>2</sub>O Neutralizer's range of performance.

## 5M H<sub>2</sub>O Neutralizer Packages

|   | 5M-5200 | 5M-5250 | 5M-5260 |
|---|---------|---------|---------|
| <b>5M H<sub>2</sub>O Neutralizer</b> includes:<br>5M H <sub>2</sub> O Neutralizer Device & Storage Case,<br>Orifice Ring Insert set (3½", 3", 2½", 2", 1½", 1", ¾", ½"),<br>Type "D" Cam Lock Adaptor (5" FNPT x 5"), -<br>5' - ¾" Tubing (2), - 16oz. No-Chlor™ Calcium thiosulfate Solution | ✓       | ✓       | ✓       |
| <b>Diffuser Kit</b> includes:<br>5" x 20' - Nitrile Rubber Discharge hose,<br>5" Full Flow Diffuser, -5" Dust Cap   |         | ✓       | ✓       |
| <b>EZ Mount Kit</b> includes:<br>5" x 10" Nitrile Rubber Hose,<br>EZ Mount Arm System   |         |         | ✓       |



Diffuser Kit



EZ Mount Kit

# H<sub>2</sub>O Neutralizer<sup>®</sup>

Simply the Best Chlorinator/DeChlorinator on the Market Today

from

[www.h2oneutralizer.com](http://www.h2oneutralizer.com)

# Measurement Technologies

PO Box 2195, Redmond, WA 98073

Toll Free 877-889-8482

