

Chlorinate/ DeChlorinate



U.S Patent
6,264,846

Three
Package
Combinations
to Choose
From

5M-5150
Total
Solution
Package
Shown
Here

Rated for
Flow Range
of
10 to 4000+
gpm

H₂O Neutralizer's Patented Venturi Design
Operates on Nothing But the
Flow of Water Through the Device

with
H₂O Neutralizer[®]
Simply **2** the Best Chlorinator/DeChlorinator on the Market Today

H₂O Neutralizer's patented Lateral Bypass Venturi design provides superior performance, achieving full vacuum at flows as low as 10 GPM with consistent solution feed of 1 gallon per minute through its entire rated range of flow.

from


Measurement Technologies




Truly the Most Effective Chlorinator/Dechlorinator Available Anywhere.

With its patented venturi design and orifice ring inserts H₂O Neutralizer delivers a range of performance no other device on the market today can match.

Able to draw one gallon per minute of chemical at flow rates as low as 10 GPM, the model 5M can handle flow rates over thirteen hundred gallons per minute with consistent chemical injection performance throughout the entire range of flow rates.

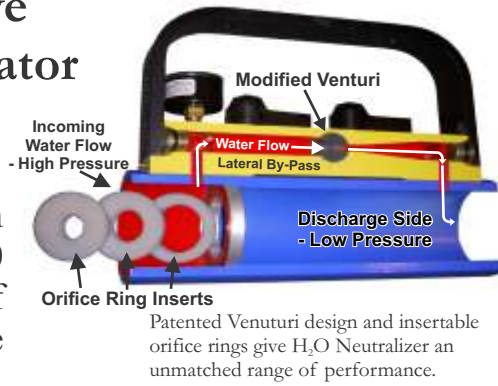


Patented Venuturi design and insertable orifice rings give H₂O Neutralizer an unmatched range of performance.

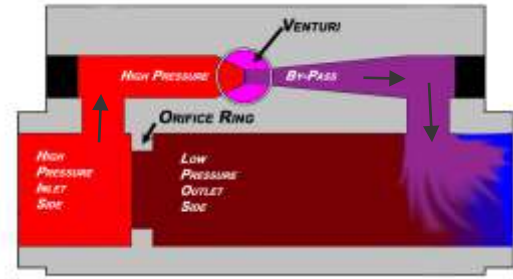

It's patented lateral-by-pass venturi permits the H₂O Neutralizer to operate with no power...



just the flow of water creates the vacuum needed...

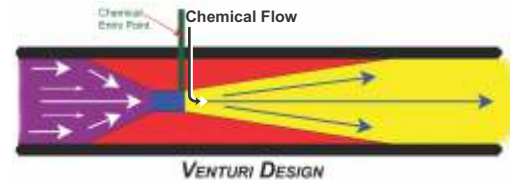

to draw in chemical at 1 GPM at flow rates through the device ranging from 10 GPM to over 4000 GPM.



5M-5100

Available in a variety of packages, there is sure to be combination to meet your project requirements.

Give us a call, or visit us on-line, today to learn more about how H₂O Neutralizer can deliver better performance in your chlorination and dechlorination projects.



No other device on the market can match H₂O Neutralizer's range of performance.

5M H₂O Neutralizer Packages

	5M-5100	5M-5150	5M-5160
5M H₂O Neutralizer includes: 5M H ₂ O Neutralizer Device & Storage Case, Orifice Ring Insert set (3½", 3", 2½", 2", 1½", 1", ¾", ½"), Type "D" Cam Lock Adaptor (5" FNST x 5"), - 5' - ¾" Tubing (2), - 16oz. No-Chlor™ Calcium thiosulfate Solution	✓	✓	✓
Diffuser Kit includes: 5" x 20' - Nitrile Rubber Discharge hose, 5" Full Flow Diffuser, -5" Dust Cap		✓	✓
EZ Mount Kit includes: 5" x 10" Nitrile Rubber Hose, EZ Mount Arm System			✓



Diffuser Kit



EZ Mount Kit

H₂O Neutralizer®

Simply the Best Chlorinator/DeChlorinator on the Market Today

from

Measurement Technologies

www.h2oneutralizer.com

PO Box 2195, Redmond, WA 98073

Toll Free 877-889-8482

